

# ANCHOR RODS

#PREMIUM \*\*

## ACR-HP CHEMICAL ANCHOR ROD



### FEATURES


- HIGH PERMISSIBLE LOADS IN THE CONCRETE COMPRESSIVE ZONE
- WELL ACCEPTED PRODUCT FOR SYNTHETIC RESIN FIXING
- REDUCED AXIAL AND EDGE SPACINGS
- STYRENE-FREE MATERIAL
- SIMPLE INSTALLATION

### APPLICATIONS

- STEELWORK
- SUPPORTS
- RAILS
- HEAD AND BASE PLATES
- CONSOLES
- RAILINGS
- WINDOWS
- PROTECTIVE PLANKS
- SCAFFOLDING
- SIGN BRIDGES
- WAREHOUSE RACKING
- FACADES
- SHUTTERING

### SUITABLE BASE MATERIAL

- CRACKED CONCRETE
- NON-CRACKED CONCRETE
- HARD NATURAL STONE

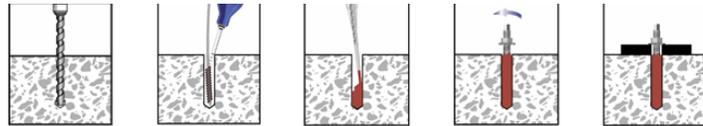

Drill a hole into the base material that suits the diameter and embedment depth of the Chemical stud anchor being used.

Blow out dust and loose materials, brush the hole and blow it out again.

Inject (mixed) adhesive into approx half the hole starting at bottom first into hole to suit type of Stud Anchor being

Insert Stud Anchor into hole and rotate by hand (flat-cut) or use hammer drill and drive bit for rotation of

Allow recommended time for curing of adhesive and then apply load. Do not disturb Stud Anchor during curing process.

CODE	ART NO.	THREAD SIZE MM	LENGTH MM	ANCHORAGE DEPTH MM
ACR-HP-08110	908811	8	110	80
ACR-HP-08150	908812	8	150	80
ACR-HP-10130	908815	10	130	90
ACR-HP-10165	908816	10	165	90
ACR-HP-10190	908817	10	190	90
ACR-HP-10250	908818	10	250	90
ACR-HP-12120	908821	12	120	100
ACR-HP-12150	908822	12	150	110
ACR-HP-12190	908823	12	190	110
ACR-HP-12220	908824	12	220	110
ACR-HP-12250	908825	12	250	110
ACR-HP-12300	908826	12	300	110
ACR-HP-16150	908831	16	150	125
ACR-HP-16190	908832	16	190	125
ACR-HP-16260	908833	16	260	125
ACR-HP-16300	908834	16	300	125
ACR-HP-16350	908835	16	350	125
ACR-HP-16500	908836	16	500	125
ACR-HP-20220	908841	20	220	170
ACR-HP-20260	908842	20	260	170
ACR-HP-20300	908843	20	300	170
ACR-HP-20350	908844	20	350	170
ACR-HP-20400	908845	20	400	170
ACR-HP-20500	908846	20	500	170
ACR-HP-24300	908851	24	300	210
ACR-HP-24400	908852	24	400	210
ACR-HP-24600	908853	24	600	210
ACR-HP-30380	908856	30	380	270
ACR-HP-30500	908857	30	500	270
ACR-HP-30750	908858	30	750	270